


FLEXIBLE "SEE-THRU" P.V.C. SWING DOOR

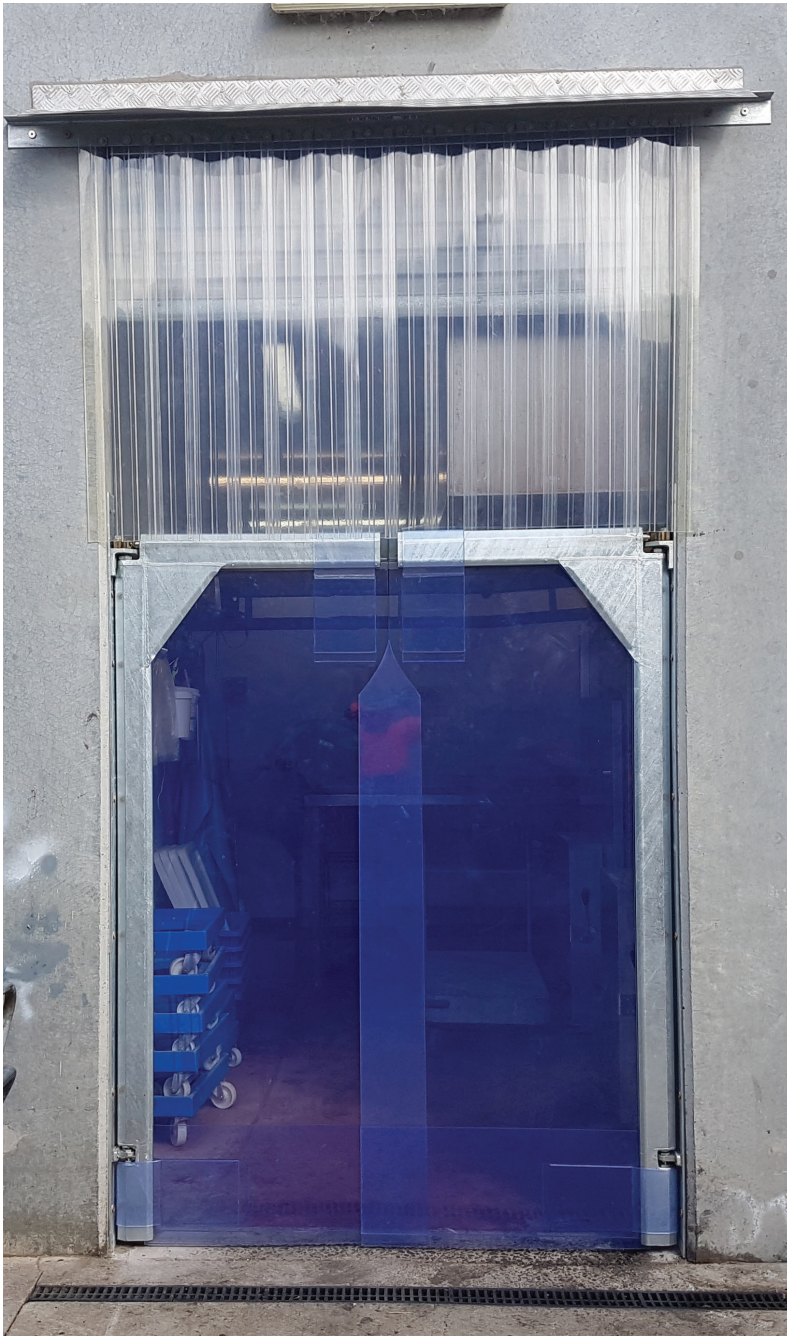

Swing Door Selection Guide

| Type | Application | Maximum Size | Door Panels |
|-------------|------------------------------|---------------------|-------------|
| Medium Duty | Pedestrian & non-motorised | 3600mm H x 3050mm W | 5mm Thick |
| Medium Duty | Pedestrian traffic only | 2900mm H x 2400mm W | 5mm Thick |
| Heavy Duty | Industrial & fork lift truck | 3660mm H x 3050mm W | 7mm Thick |
| Heavy Duty | (Tandem Head) | 4200mm H x 3600mm W | 7mm Thick |

Note: single doors are available in both medium and heavy duty types

These Flexible “See-Thru” Swing Doors are ideal for all industrial and commercial applications including factories, food processing plants, transport terminals, retail stores, supermarkets, cool stores, meat works, hospitals etc.

Manufactured in Australia they offer the most advanced features of any flexible door on the market today.

Constructed from tough resilient P.V.C. and a cold drawn steel frame, they have proven to be the ideal answer for functional style dividers.

Flexible “See-thru” Doors have the advantage of opening with a light push of the hand trolley, forklift truck or transport vehicle and automatically close after entry.

Despite their great flexibility, they keep out draughts and dust, are noiseless in operation and act as a barrier between areas of different temperatures.



Completely clear, unrestricted views

Being completely clear, the Flexible “See-Thru” Swing Doors give an unrestricted view of oncoming traffic and, if required, can remain open in the 90° position.


Flexible “See-Thru” Swing Door frames are a fully welded construction with no rivets or bolts used in the manufacture of the frame. Approximately 100mm overlap of the panels in the centre and unique free-hanging method of framing P.V.C. ensures a perfect seal under all conditions. No buckling, no tearing, no uneven hanging.

Standard finish of the door frames is hammertone grey enamel paint.

Optional finish: Hot dipped galvanised frames for cool rooms, freezer rooms and food preparation areas. Powder coating is available on request.

With patented self-closing ball hinges, Flexible “See-Thru” Swing Doors are adjustable over a wide range of closing pressures. Doors will remain open in a 90° position if required and will close under a light push.


For door openings where the height exceeds 3600mm (max. height of heavy duty doors) a see-thru gravity flap can be installed above the swing doors to provide a more economical solution. Where the width of the door opening exceeds 3000mm a tandem heavy duty type swing door is required.

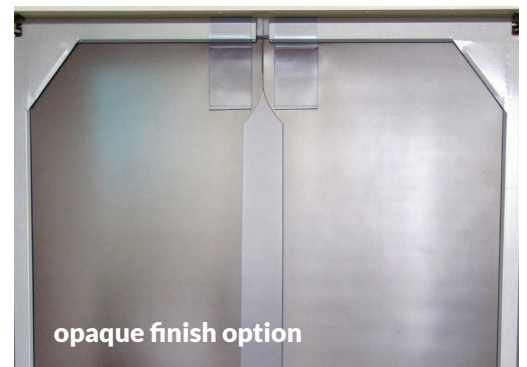


opaque finish option

"SEE-THRU" SWING DOOR SPARE PARTS


Flexible 'See-Through' Spare Parts

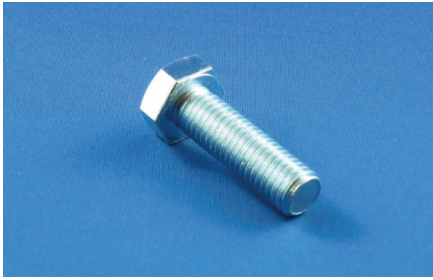


BOLT

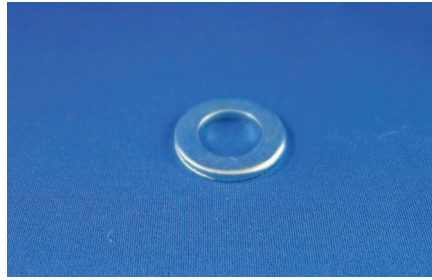

14MM WASHER

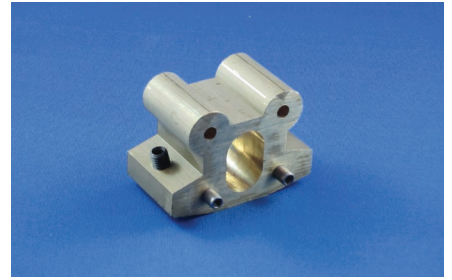

STAY CLOSED ROLLING PIECE

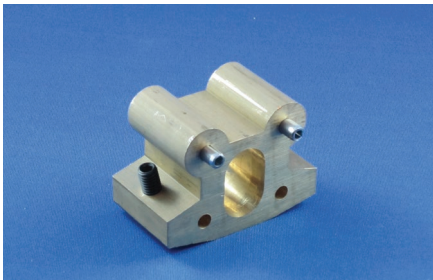

STAY OPEN ROLLING PIECE



PRISM



PLUNGER



BASE PLATE




SHOULDER SCREW WASHER



SHOULDER SCREW



WELD IN ANGLE

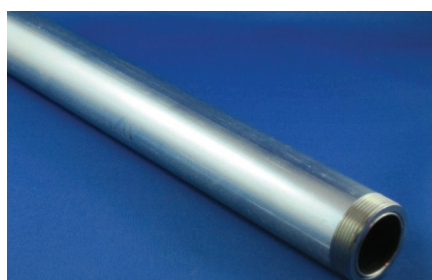

SPRING SIZE 1, 2 OR 3



COMPLETE TOP HINGE



LOWER HINGE WELD IN BRACKET



COMPLETE LOWER HINGE



SPACERS