




MTI – JW55
 MTI – JW55LA

JW-55T SERIES

- Transformer built-in.
- It accepts bulb 50W, 75W.
- Furnished with 1.8 meters cord.

Quartz Halogen Lamp

	JW55	JW55LA
A	250mm	420mm
B	200mm	390mm
C	100mm	100mm

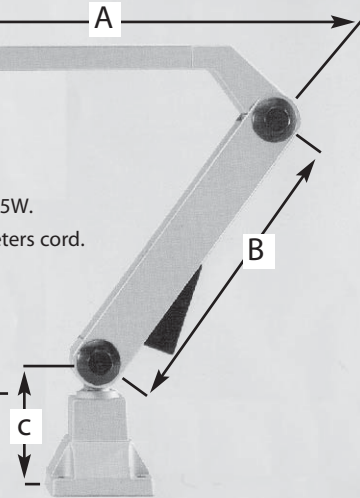

UNIVERSAL MAGNETIC BASE


VMB-70

- Guaranteed firm and solid fixation of all 5 joints by tightening just one knob.
 - Multi nimble joint for instant fixation in any position, indicator not included.
 - Fits dovetail and 3/8" or 8mm stem indicators.
 - Extra large reach – 10 - 1/2"
 - Unique design for longest life.
 - Also Available without magnetic base, M8 x 1.25 or threaded adaption.
- POWER : 70KGS
 BASE : 64 x 53 x 49mm

CO-AX INDICATOR

MTI - CTR - IND.

- A unique approach to quick, accurate centering in boring and milling set-ups.
- Operates at any angle from HORIZONTAL to VERTICAL without any change, and from INTERNAL to EXTERNAL diameter by simply changing the feeler.
- Indicator dial remains stationary while the machine spindle rotates, leaving the operator with both hands free to accurately X-Y position the machine table, while conveniently observing the indicator.
- By using the CO-AX Indicator with the machine spindle running, exact operating conditions are simulated for the centering function since the influence of power transmission, lubricant flow, spindle bearing characteristics and torque are integrated into the indicator reading.
- No walking around the machine necessary — No mirrors required — No contortions — Exact chucking not necessary.

